

15" TFT monitor for the DIEBOLD OPTEVA series




Series: TFT-15-GAA

This monitor is available in standard version with LED backlights and has been developed for the following Diebold ATM systems:

Opteva 500 / 520 / 560 / 562

Opteva 720 / 740 / 750 / 760

- Long life cycle due to energy-saving LED technology.
- Excellent clear picture.
- Easy installation by Plug & Play.

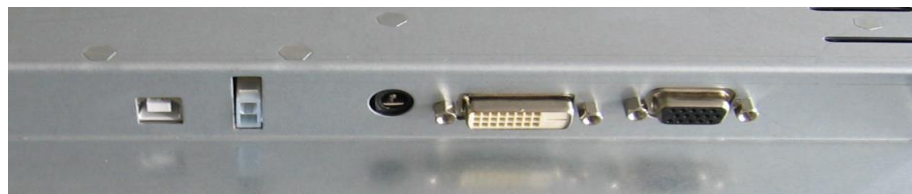

Technical Data

Display: Standard

Display size	15"
Brightness	400 cd/m ² (LED)
Resolution	1024 x 768 pixel (XGA)
Contrast	700 : 1

Input signal:

Video output	VGA
H. Frequency	31 - 35 kHz
V. Frequency	50 - 75 Hz
Sync. signal	H/V separated, TTL level
Pixelclock	max. 30 MHz
Colours	6 bit per colours

Adjustments (OSD): brightness, contrast, horizontal position, vertical position, default; settings saved automatically

Power management: background lighting is switched off by missing video signal

Connections:

Input signal	VGA / DVI / USB (internal)
Power supply	24V DC mini fit connector from ATM
Power consumption	10 W

Operation conditions: operating temperature -10° - +65°C

MTBF: background lighting 50.000 hours / 25°C

Weight: approx. 4,5 kg (9.5 lbs)

Scope of delivery: 15" monitor chassis

Manufactured acc. to: CE compliant
RoHS
WEEE

Warranty: 24 months

Date: 01/2016